

Feature

- § Low Power Consumption
- § I.C. compatible


Applications

- § Commercial Outdoor Sign Board
- § Front Panel Indicator
- § Dot-Matrix Module
- § LED Bulb

Description

- § These LEDs are Based on AlInGaP/GaAs Material Technology
- § Red Diffusion Lens

Package Dimension

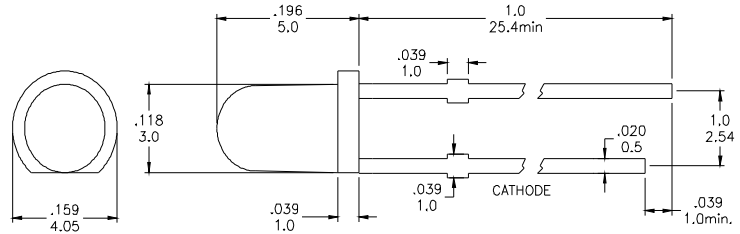


* Tolerance : $\pm \frac{0.01}{0.25}$ Unit : $\pm \frac{\text{inch}}{\text{mm}}$

Absolute Maximum Ratings at Ta = 25°C

Symbol	Parameter	Max.	Unit
PD	Power Dissipation	120	mW
VR	Reverse Voltage	5	V
IAF	Average Forward Current	30	mA
IPF	Peak Forward Current (Duty=0.1 · 1kHz)	100	mA
—	Derating Linear Form 25°C	0.4	mA / °C
Topr	Operating Temperature Range	- 40 to + 85	°C
Tstg	Storage Temperature Range	- 40 to + 100	°C
Lead Soldering Temperature [1.6mm (0.063inch) From Body] 260°C For 5 Seconds.			

Electrical / Optical Characteristics and Curves at Ta = 25°C

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
VF	Forward Voltage	IF = 20 mA		2.1	2.4	V
IR	Reverse Current	VR = 5 V			100	μA
$\Delta \theta$	Half Intensity Angle	IF = 20 mA		45		Deg.
IV	Luminous Intensity	IF = 20 mA	1300	1550	--	mcd.
λd	Peak Wavelength	IF = 20 mA		620		nm



**APEX OPTO
CORP**


SUPERBRIGHT LED LAMP

AOL-3JOT2-B

版 本	製 訂 日 期	變 更 項 目
A	2009/10/13	新規格發行

電 性 圖	▼	尺 寸 圖	▼	角 度 圖	▼
-------	---	-------	---	-------	---

核 准:	審 核:	製 作:
		Tony.Kuo.



**APEX OPTO
CORP**

SUPERBRIGHT LED LAMP

AOL-3JOT2-B

Electrical Characteristics at Ta = 25°C

Symbol	I _v		V _F		λ D	
Parameter	Luminous Intensity		Forward Voltage		Dominant Wavelength	
Condition	IF=20mA		IF=20mA		IF=20mA	
Unit	mcd		V		nm	
Binning	Grade	Range	Grade	Range	Grade	Range
	BIN 17	1300~1800	C	1.9~2.0	O2	620~625
			D	2.0~2.1	O3	625~630
			E	2.1~2.2		
			F	2.2~2.3		
			G	2.3~2.4		

Intensity: Tolerance of minimum and maximum = ± 15%

V_F: Tolerance of minimum and maximum = ± 0.05v


NOTE:


1. Static electricity and surge damages the LED. It is recommend to use a anti-static wrist band or anti-electrostatic glove when handing the LEDs. All devices, equipment and machinery must be properly grounded.

Radiation Diagram

IF=20 mA 50% Power Angle Angle =45°

Radiation Diagram

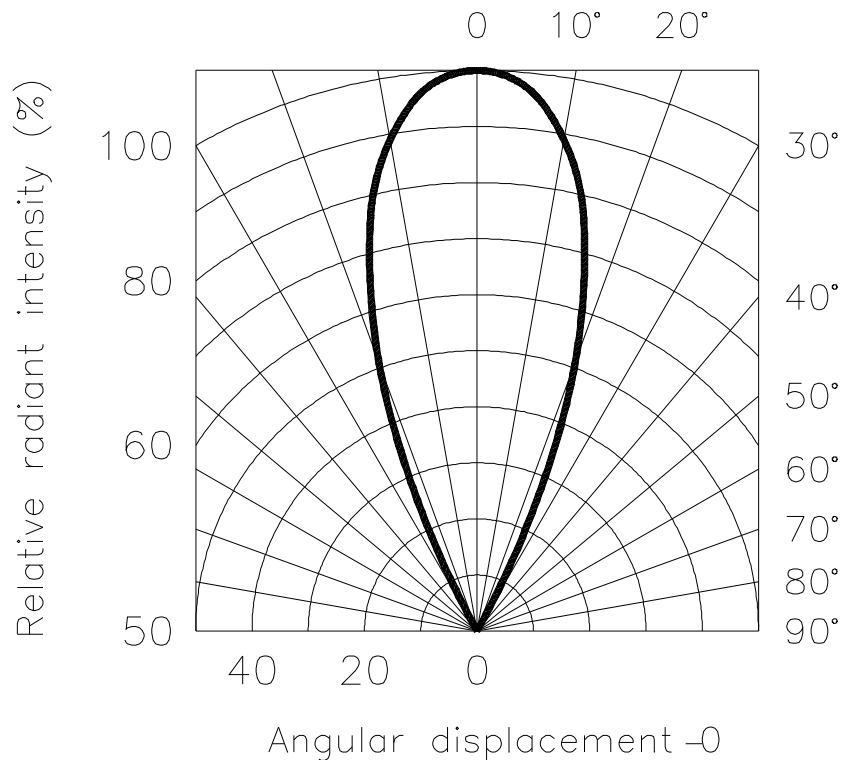



**Typical Electro-optical Characteristic Curves
(25°C Free Air Temperature Unless Otherwise Specified)**

Fig 1. Forward Current vs. Forward Voltage

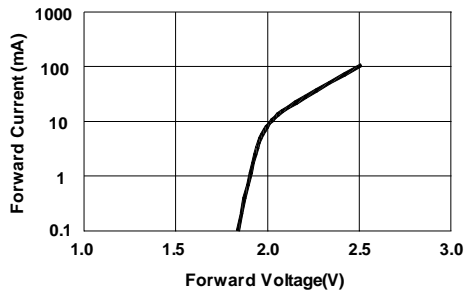


Fig 2. Relative Intensity vs. Forward Current

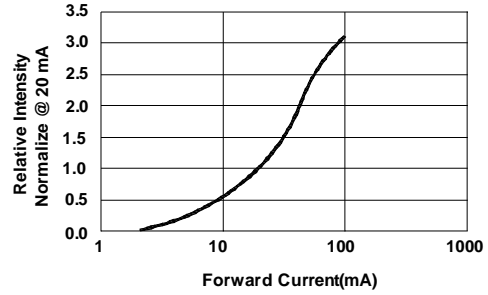


Fig 3. Forward Voltage vs. Temperature

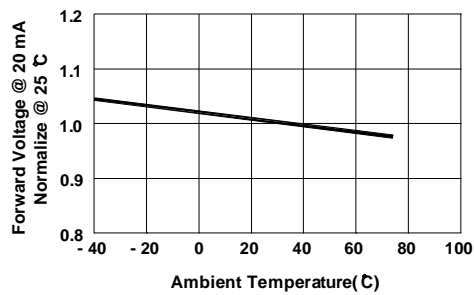


Fig 4. Relative Intensity vs. Temperature

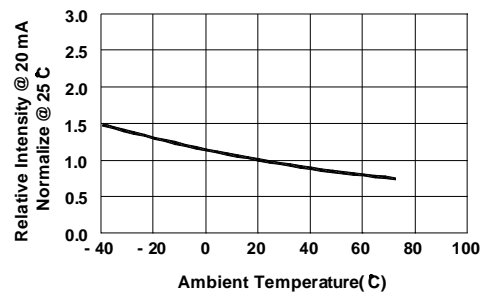


Fig 5. Relative Intensity vs. Wavelength

